

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 April 2005 (14.04.2005)

PCT

(10) International Publication Number
WO 2005/032666 A1

(51) International Patent Classification⁷: **A63B 47/02,**
57/00

(21) International Application Number:
PCT/SE2004/001304

(22) International Filing Date:
10 September 2004 (10.09.2004)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0302638-2 6 October 2003 (06.10.2003) SE

(71) Applicant and

(72) Inventor: **LINDH, Hans** [SE/SE]; Norrbackagatan 12,
S-113 41 Stockholm (SE).

(74) Agents: **SUNDSTRÖM, Per** et al.; Stenhagen Patentbyrå
AB, P.O. Box 4630, S-116 91 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A TOOL FOR PICKING UP A GOLF BALL

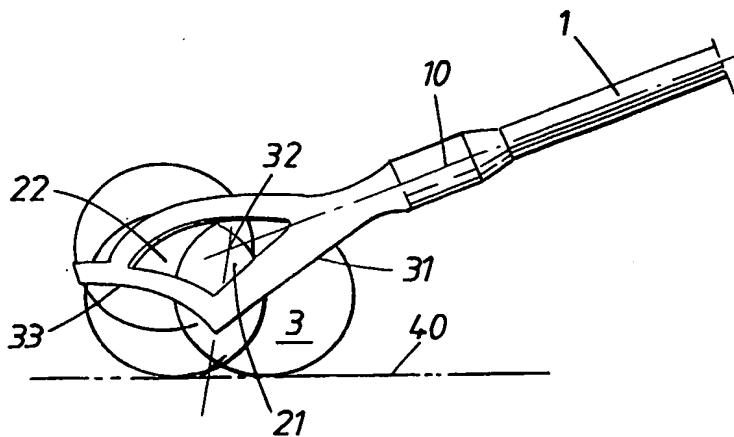

(57) Abstract: A golf ball retrieval tool comprising an elongate handle (1) which carries at one end a so-called cage (20) which has at its rear end that faces towards the handle (1) a first section (21) and at a part distal from said handle a second section (22) which connects with said first section (21), wherein in a first cage orientation of the tool the first cage section has an opening edge (21) which, in said first tool orientation, is generally open downwards and rearwards towards the handle and which is able to freely receive a golf ball, wherein a transit opening (32) connects the first section (21) with the second section (22), wherein the second section includes a downwardly open opening (33) which forms a ball seating, wherein, with the tool in said first cage orientation, the

handle extends obliquely downwards beneath the horizontal plane of the cage (22), and wherein the transit opening (32) between said first and said second sections forms a threshold (35) over which the ball must run. The cage comprises a roof structure which in response to pressing the cage generally vertically against a ball, which as a result is received in the first section, when the tool is in said first cage orientation, generates on the ball a wedging action such as to drive the ball through the transit opening (32) and into the second section (22) where the ball (3) can be received in the ball seating (33).